



# GURTECH

Manufacturers of the Durable Range  
of **GGun** Lubrication Equipment


# G.Coupler

THE ORIGINAL

## THE GURTECH™ GREASE GUN COUPLER – LONG SERIES

### Spring Loaded Activation Trigger

- Simply depress the trigger when locking the coupler onto the Zerk or to release the coupler when done.
- Easy clip-off, regardless of pressure build up in the line. NO MORE stuck couplers.
- No need to hold while greasing. Lock-on and free up both hands to operate your grease gun.

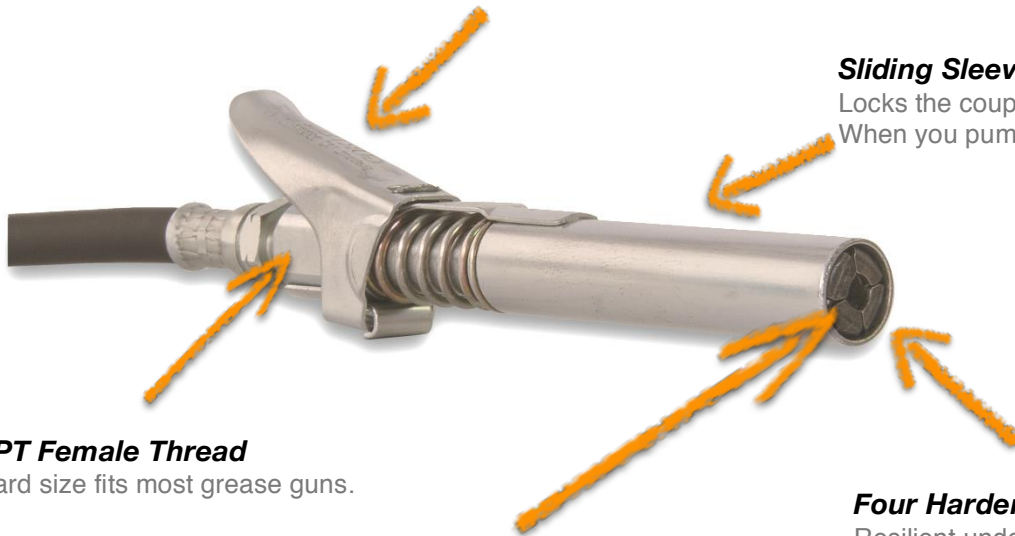

### Sliding Sleeve

Locks the coupler onto the grease nipple.  
When you pump grease ... it stays on!

### 1/8" NPT Female Thread

Standard size fits most grease guns.

### Leak Free, High Pressure Seal

Long lasting TPU seal reduces leakage.

### Four Hardened Spring Steel Jaws

Resilient under high pressure, fitting all  
DIN and SAE specification grease  
nipples.

## Technical Specifications

Description	Specification
Max Pressure	10,000 psi (690 Bar)
Zerk Compatibility	Fits all DIN (Metric) and SAE specification Zerks (grease nipples).
Coupler Thread	1/8" NPT female thread.
Dimensions	L: 5 1/2 x W: 31/32 x H: 1 1/2 In (L: 88 x W: 16.4 x H: 41 mm)
Diameter (front coupler)	31/32 in (16 mm). Fits most recessed Zerks (grease nipples).
Weight	6 oz (165 g)
Grease Gun Compatibility	Works with all grease gun types: pneumatic, manual and electric.
Seal	Durable TPU seal for longevity under high pressure.
Lock-on Mechanism	Four hardened spring steel jaws are resilient under high pressure.
Patents	WO 2011/069172, others on application